




Colours may vary slightly from samples shown.

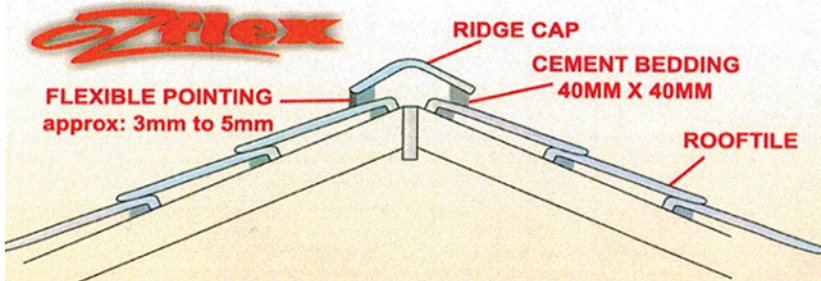

**POINTING FOR RIDGE CAPS
EXCEED CSIRO AS 2050
APPENDIX F (DRAFT) TO C3 RATING**

Oz Flex Pointing has been developed in conjunction with roof tilers of some 30 years experience. This has ensured Oz Flex is the most user friendly pointing on the market. Oz Flex has achieved an ease of trowel application and smooth fine finish whilst still maintaining its adhesion and flexibility. Oz Flex is available in 10 Litre and 4 Litre plastic sealed containers.

Description Oz Flex is a highly Flexible Pointing Compound with excellent adhesion properties for long term durability under harsh conditions. Oz Flex is used for Pointing new and old Ridge Capping.

Application 1. Oz Flex covers approximately 40 to 50 ridge caps per 10 litres.

2. Point approx 1 metre of ridge capping and trowel to a steeled finish. Lubricate trowel with water.
3. Apply 3mm to 5 mm thick.
4. Weep holes should be put in before curing has progressed too far.

Clean Up Clean tools with water before Oz Flex has dried.

Drying time On warm days Oz Flex will be water resistant after 2 hrs. Allow longer curing time for low temperatures and high humidity conditions. Never apply if rain is likely within two hours.

**MEETS AS4046.8-2006
FOR WIND CLASS C3**



FACTORY OUTLET:

**Shieldcoat Perth
Unit 6, 46 Triumph Ave,
Wangara, WA 6065**

www.oz-flex.com.au

**Tel: 08 93022 789
Fax: 08 93022790**